


SUPRAFINE XL

15mm (9/16") Exposed Tee



Physical Data

Material

Hot dipped galvanized base metal
Hot dipped galvanized and baked polyester paint
capping and molding

Face Dimension

15mm (9/16")

Profile

Exposed tee system

Color

White

Surface Finish

Baked polyester paint

Cross Tee/Main Beam Interface

Override

End Detail

Main Beam: Coupling
Cross Tee: Staked-on clip

Classification

Intermediate duty

DUNE with SUPRAFINE 9/16" Exposed Tee grid



SUPRAFINE
Main Beam



SUPRAFINE XL
Cross Tee

AUSTRALIA

— SYDNEY (NSW)

Tel: (612) 9748 1588
Fax: (612) 9748 7244
Email: awp@armstrong.com

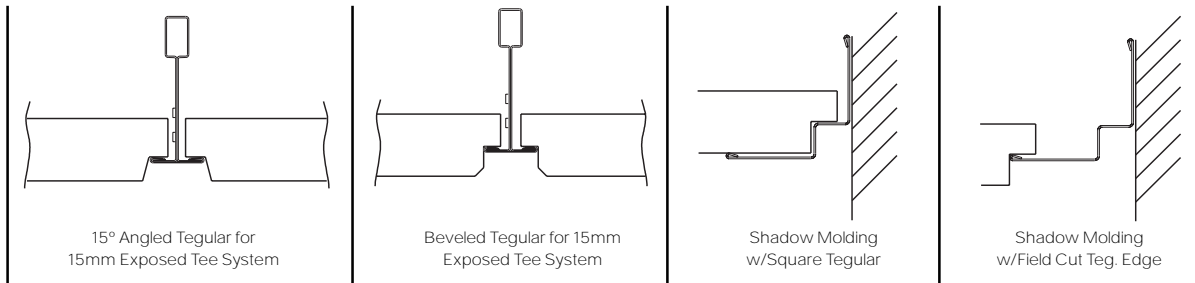
MELBOURNE (VIC/TAS)

Tel: (613) 9580 9633
Fax: (612) 9748 7244

BRISBANE (QLD/NT)

Tel: (617) 3272 0533
Fax: (617) 3272 0690

Ceiling / Grid and Wall / Grid Interface Drawings



SUPRAFINE XL

15mm (9/16") Exposed Tee





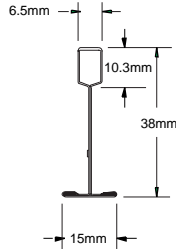




Product Description



- ASTM C 635 (Intermediate-duty) main beam classification, commercial-quality hot dipped galvanized steel. Exposed surfaces chemically cleansed, capping prefinished in baked polyester paint.
- Double-web construction and rectangular top bulb.
- Universal coupling end main beam.
- Staked on clip end cross tee.
- Hemmed wall molding.
- Hanger wire holes every 150mm on main runners and every 600mm on cross tees for easy installation.

Key Selection Attributes / Benefits

See pg.9

Item	Item No.	Length (mm)	Height (mm)	Width (mm)	
Main Beam 38mm  32mm 	BP754033	3600	38	15	 BP754033
	BP7542102	3000	32	15	
Cross Tee 38mm/32mm 	BP753033	1200	38	15	 BP753033/BP752032
	BP752032	600	38	15	
	BP7530102	1200	32	15	
	BP7520102	600	32	15	
Wall Molding 	BP784203	3000(L)			

LOAD CAPACITY

<38mmH>

600x600 module



Maximum Fixture Weight

13.95kg/m²

600x1200 module

Maximum Fixture Weight

13.95kg/m²



<32mmH>

600x600 module

Maximum Fixture Weight

8.17kg/m²

600x1200 module

Maximum Fixture Weight

8.17kg/m²

